


## instruction-manual



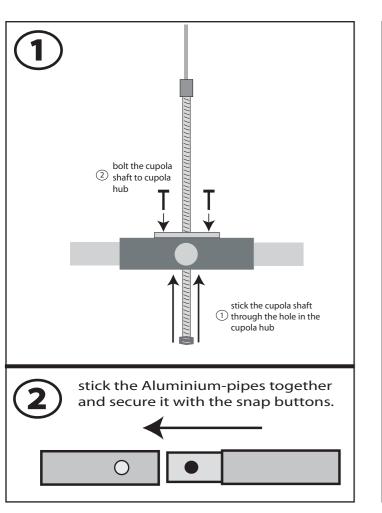


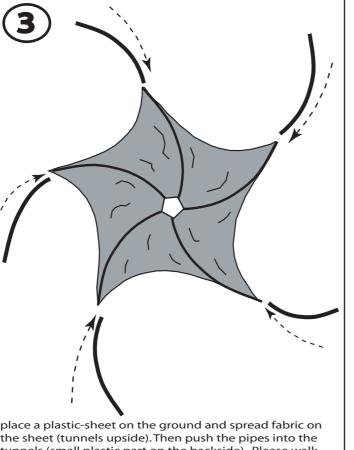

the sheet (tunnels upside). Then push the pipes into the tunnels (small plastic part on the backside). Please walk on fabric without shoes and take care about a clean ground.

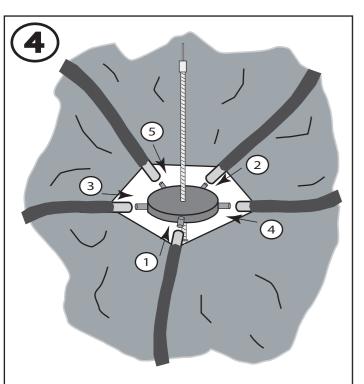


place the cupola hub with the fixed cupola shaft into the center opening of the fabric. (the long part of the shaft on upper side). Then connect the frame legs to the cupola hub. Please mind to do this according to No. 1 - 5. Sliding the fabric inward towards the center opening will ease the legs connection to the hub.

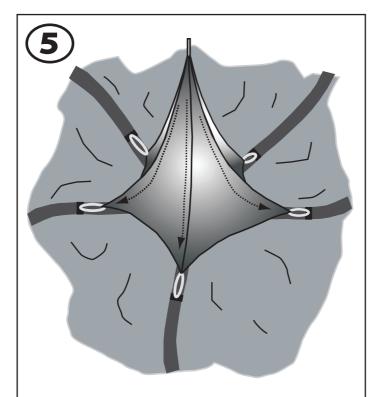


place the cupola fabric over the shaft and snap to the webbing loop along the tunnels. if applicable: place the cupola flag onto cupola shaft.

## instruction-manual

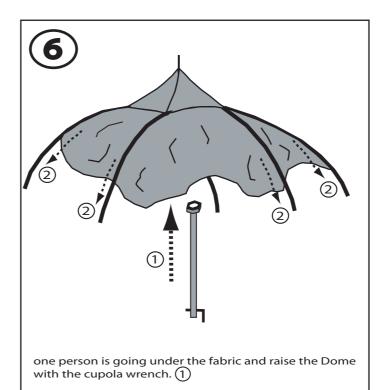

the other person(s) lift and twist the frame legs in a straight position to the center-hub and pulling the fabric down towards the ground. (2)

the one person is holding the cupola-wrench as long as the Dome is stable enough to stand itself.

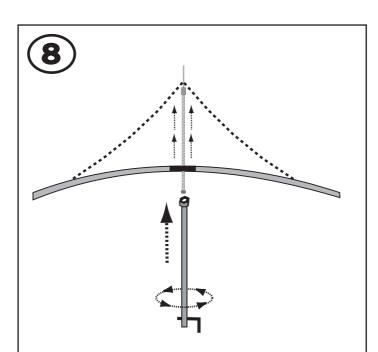

hold the cupola wrench to the bottom part of the cupola shaft and turn the wrench to raise the cupola until fabric becomes wrinkle free. Caution: do not over tighten !!

Then take away the wrench and check again the tension at all legs.



